



TRAVELING WITH CHARGER

When on-location, secure the charger bag by latching its loop end and drawing onto the top and bottom of the carry case's strap hooks.



GEL CLIPS

Add color or warmth using the included gel clips. Simply cut your gel to size, place over the Ice Light and clip into place.



Light the way.

Thank You!

for purchasing this Westcott® product.

Register your purchase.

We have a simple form for registering your Westcott purchase that provides you with added assurance for your gear: fjwestcott.com/warranty

Visit fjwestcott.com

- Video Tips
- Product Support
- Knowledge Base
- Product Reviews
- Contests & More!



©JERRY GHIONIS

One year against manufacturer defect.

Westcott's warranty obligations for this product are limited to the terms set forth below: The F.J. Westcott Co. ("Westcott") warrants this Westcott branded product against defects in materials and workmanship under normal use for a period of ONE (1) YEAR from the date of retail purchase by the original end-user purchaser ("Warranty Period"). If a defect arises and a valid claim is received within the Warranty Period, at its option and to the extent permitted by law, Westcott will either (1) repair the defect at no charge, using new or refurbished replacement parts, or (2) exchange the product with a product that is new or which has been manufactured from new or serviceable used parts and is at least functionally equivalent to the original product. This Limited Warranty applies only to products manufactured by or for Westcott that can be identified by the "Westcott" trademark, trade name, or logo affixed to them.

This warranty does not apply: (a) to damage caused by accident, abuse, misuse, flood, fire, earthquake or other external causes; (b) to damage caused by operating the product outside the permitted or intended uses described by Westcott; (c) to a product or part that has been modified to alter functionality or capability without the written permission of Westcott; or (d) to cosmetic damage, including but not limited to scratches, dents and broken plastic.

Please contact Westcott's Repair Department for a Return Authorization Number "RMA" prior to requesting warranty service. This RMA must be clearly written on the outside of the box to the left of the shipping label. Items sent in without pre-authorization or that do not fall under the ONE (1) YEAR limited warranty will be returned at the expense of the sender.

Register this product at FJWESTCOTT.COM/WARRANTY

Repair Dept.: **800-886-1689** / 419-243-7311 (International)

E-Mail: INFO@FJWESTCOTT.COM
SUBJECT: ATTN: REPAIR DEPT.

Shipping: F.J. Westcott Co, 1425 Holland Rd, Maumee, OH 43537



©F.J. WESTCOTT CO. ALL RIGHTS RESERVED. EA0320



QUICK START GUIDE



CONTENTS & USAGE

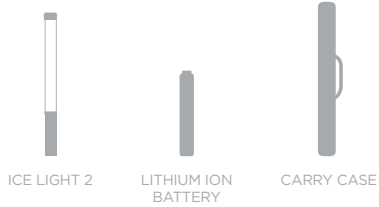

POWER CONTROL

Press and slide the power control upward to power on the Ice Light 2. Press and slide the power control downward to power off the Ice Light 2.

LIGHT OUTPUT CONTROLS

The Ice Light 2's light output can be adjusted in 18 increments. Use the up and down arrow buttons to adjust the light output. The current output level appears on the Digital Light Output Display. From lowest to highest output, these values are displayed as:

L - 2 - 2 - 3 - 3 - 4 - 4 - 5 - 5 - 6 - 6 - 7 - 7 - 8 - 8 - 9 - 9 - H

FEATURES & SPECS

FEATURES



- A. Accessory attachment threaded 1/4-20"
- B. Frosted diffusion front
- C. Removable Lithium Ion Battery
- D. AC/DC Operation
- E. Accessory attachment threaded 1/4-20"

- F. All-metal construction
- G. Digital LED Light Output Display
- H. Dimmer Controls
- I. Power Slider
- J. Battery Power Indicator

SPECIFICATIONS

LAMP TYPE	LED Array	DIMMABLE RANGE	1.5w - 15w
LED HOURS	50,000+	POWER SUPPLY	Input 100-240v 50/60hz Lithium Ion 7.4v
CRI	96	BATTERY CHARGE TIME	2.5 hours
LUMENS	1,740 lm	BEAM ANGLE	72.6 degrees
COLOR TEMPERATURE	5500K ± 100	MOUNT	Handheld with 1/4-20" thread (both ends)
BATTERY LIFE	60 minutes ± 10%	SIZE	21.6" x 1.7" (55cm x 4.4 cm)
POWER DRAW	1.5w - 15w	WEIGHT	1.25 lbs (0.57 kg)

CAUTION

- The included charger is restricted to use with only the Ice Light 2. Never use any power cable or transformer on the Ice Light 2 other than the one provided.
- Do not use the Ice Light 2 in or near water. Do not allow the unit to become wet and do not expose the unit to extreme temperature.
- The charging terminal and indication lights may become warm during operation or charging. Take care when handling.
- Always unplug the charging cord when not in use.

REMOVABLE BATTERY



BATTERY POWER LEVEL

The Battery Power Indicator displays the current battery power level using the illuminated lights:



CHARGING

To charge, connect the Ice Light 2 charger cord to the battery's AC/DC operation input and plug into any standard 110v-240v outlet. A fully depleted battery recharges in approximately 2.5 hours.

The Ice Light 2 can be charged both inside and outside of the unit using the charging port on the battery. To remove the battery, press downward on the tab and pull outward.